


Subconn PUR Cable

Type: P9C20#OS

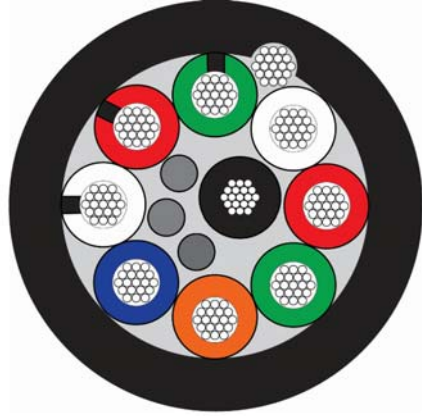

Document no. 2019051SC  
 Revision C  
 Date 29.10.2020  
 Prepared by JLG  
 Approved by SB

**Construction Characteristics**

<b>Filler</b>	Filler for roundness (3 ea)
<b>Power conductor</b>	0,52 mm <sup>2</sup> (20 AWG) stranded tinned copper conductors insulated with Polypropylene (9 ea.) Colour code: 1. black, 2. white, 3. red, 4. green, 5. orange, 6. blue, 7. white/black, 8. red/black, 9. green/black
<b>Shield</b>	Aluminium/polyester foil and 20 AWG drain wire.
<b>Outer jacket</b>	Polyurethane jacket, colour: Black, gloss finish. 1,27 mm nominal wall thickness. Print in white: "SUBCONN P9C20#OS"  The cable is Halogen free

**Mechanical Characteristics**

<b>Diameter</b>	9,12 mm
-----------------	---------

**Electrical Characteristics**

<b>Operating voltage</b>	600 V
--------------------------	-------